Stormwater SUV

Porous Pavement Maintenance


ROUTINE VACUUMING

- Complete solution for routine maintenance of porous pavement and green infrastructure (such as bio-retention, rain gardens, and tree box filters)
- Powerful pure vacuum and blower — easy to use, stand-on operation
- Integrated hand wand and large volume, on-board debris collection
- Versatile tool for non-stormwater property maintenance with available attachments
- General landscaping, litter/leaf collection, fall/spring cleanup







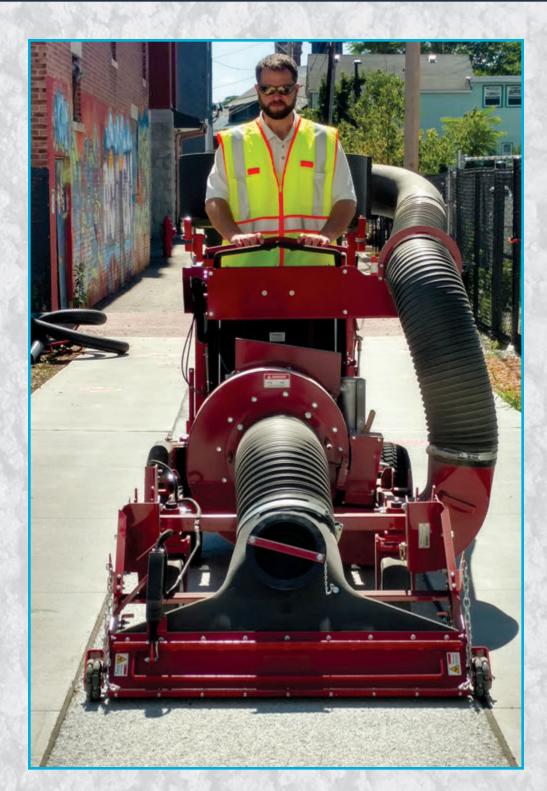

The B.I.R.D.

Porous Pavement Maintenance

FOCUSED DEEP CLEANING

- Most effective rehabilitation system available for all porous pavement
- Focuses extreme suction and water pressure of vactor directly to porous surface
- Simultaneously blasts and extracts sediment from clogged pavement
- Available as a manually-driven system or mated with the SUV system (vactor truck required)
- Restores maximum possible infiltration rate of any porous pavement system











When it Rains…it's Porous™

1.888.357.1161 - WWW.STORMCRETE.COM

163 Thadeus Street. South Portland, ME 04106

Stormwater (SUV) - The Stand-On Stormwater Utility Vacuum

Features Multi-use equipment for Green Infrastructure, litter pick up, inlet cleaning, general landscaping, powerful blower, etc. Compatible with the B.I.R.D. (Bunyan Infiltration Restoration Device) for deep porous pavement rehabilitation (Jet-Vac Truck Required) Quick-Hitch Vacuum Hood Assembly (adjustable from operators stand for varying surface conditions) Intake/Suction Hose (12" Diameter) Discharge Hose (10" Diameter) Collection Container Trailer & 96 Gallon Collection Container w/ wheels (1 included) Auxilary Handheld Bio-Maintenance Attachment for Bio-Retention and Litter Full Hydro-Static Drive Dual HydroGear ZT 3100 Multi-uselift arms – Electronically Actuated from Operators Position

Other implements available

Machine Specifications	
•	Lenth – 13 feet – 9 inches
•	Maximum Width – 56"
•	Overall Height – 72"
•	Approx. Weight – 1,300 lbs
•	Cyclone Particulate Seperator – 36" Diameter x 12" Height (with Filtration Bags – 25 and 50 micron)
•	Hood Suction Opening – 5-1/2" x 42"
•	Vacuum Hood Max Lift Heigh – 17 ½"
•	Power by 27 HP - Kohler CH752 V-Twin (Command Pro Series)
•	Electric Start Standard
•	8 MPH Forward Speed
•	HP Blower – Approx. 5000 cfm

